

SafeSite® LED Area Light


100-277 VAC, 120-250 VDC



| Project Information | |
|---------------------|-------|
| Part Number: | |
| Project: | |
| Fixture Type: | Date: |

| Specifications |
|----------------|
| |
| |
| |
| |

Ordering Information

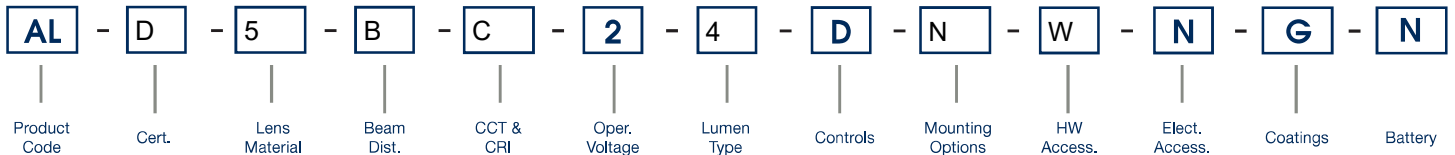

Product Code

AL Area Light

Certification

- D** UL 844 Class I Div. 2
CSA C22.2 No. 137- M81
- F** UL 844 Class II Div. 1, 2
Class I Div. 2
CSA C22.2 No. 137- M81

Lens Material

- 5** Polycarbonate - Diffused
- 7** Glass - Clear

Beam Distribution

- A** 180°
- B** 360°
- W** Wide

CCT & CRI

- C** Cool White 5000K - 80 CRI
- N** Neutral White 4000K - 80 CRI

Operating Voltage

- 2** 100-277 VAC, 120-250 VDC

Lumen Type

- 3** 3,001 - 4,000 Lumens
- 4** 4,001 - 5,000 Lumens
- 6** 5,001 - 6,000 Lumens
- 7** 6,001 - 7,000 Lumens
- 9** 8,001 - 9,000 Lumens

Controls

- D** Dimming (0-10V)

Mounting Options

- Retro-fit Adapter**
- Universal Mounting Adapter (UMA)**
- A** Appleton Mercmaster III
- B** Swivel Bracket, Locking 0°- 90°
316 Stainless Steel
- C** Crouse-Hinds - Champ
- G** GE Filtr-Gard
- H** Thomas & Betts Hazlux
- K** Killark Certilite & Certilite V
- M** Appleton Mercmaster II
- N** 3/4" NPT
- S** 45° Stanchion Mount
- U** UMA - Mounting Hub
- V** 0° Wall Mount
- W** 45° Wall Mount

Hardware Accessories

- N** For Mounting Options - A, C, G, H, K, M, S, U, V, W, Y (individual wire leads are terminated in adapter housing)
- W** 10 ft (3 meter) Power Cable for Mounting Options - B, N

Electrical Accessories

- N** No Option

Coatings

- G** Gray (RAL 7040)

Battery

- N** No Option

Notes

- When ordering Beam Distribution **W** - Wide: Lumen Type = 7.
- When ordering Mounting Options "UMA" or "Retro-fit": Hardware Accessories = **N**.
- When ordering Mounting Option **U** - UMA Mounting Hub HZXW01, HZXW45, HZXS45 or HZXC34 is required. See page 37 for details.
- For lumen output see page 10.