

SafeSite® LED Area Light


100-277 VAC, 120-250 VDC



Project Information	
Part Number:	
Project:	
Fixture Type:	Date:

Specifications

Ordering Information

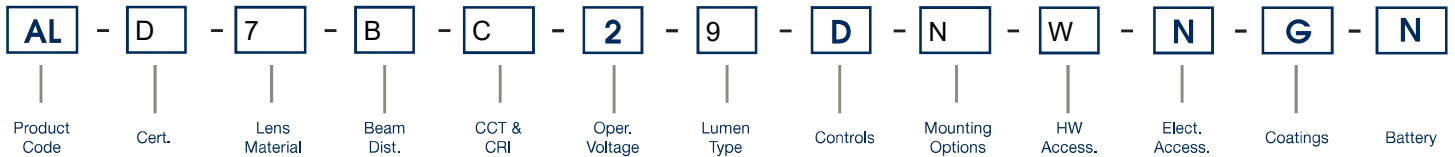

Product Code
AL Area Light

Certification
D UL 844 Class I Div. 2
 CSA C22.2 No. 137- M81
F UL 844 Class II Div. 1, 2
 Class I Div. 2
 CSA C22.2 No. 137- M81

Lens Material
5 Polycarbonate - Diffused
7 Glass - Clear

Beam Distribution
A 180°
B 360°
W Wide

CCT & CRI
C Cool White 5000K - 80 CRI
N Neutral White 4000K - 80 CRI

Operating Voltage
2 100-277 VAC, 120-250 VDC

Lumen Type
3 3,001 - 4,000 Lumens
4 4,001 - 5,000 Lumens
6 5,001 - 6,000 Lumens
7 6,001 - 7,000 Lumens
9 8,001 - 9,000 Lumens

Controls
D Dimming (0-10V)

Mounting Options
 Retro-fit Adapter
 Universal Mounting Adapter (UMA)

- A** Appleton Mercmaster III
- B** Swivel Bracket, Locking 0°- 90° 316 Stainless Steel
- C** Crouse-Hinds - Champ
- G** GE Filtr-Gard
- H** Thomas & Betts Hazlux
- K** Killark Certilite & Certilite V
- M** Appleton Mercmaster II
- N** 3/4" NPT
- S** 45° Stanchion Mount
- U** UMA - Mounting Hub
- V** 0° Wall Mount
- W** 45° Wall Mount

Hardware Accessories
N For Mounting Options - A, C, G, H, K, M, S, U, V, W, Y (individual wire leads are terminated in adapter housing)
W 10 ft (3 meter) Power Cable for Mounting Options - B, N

Electrical Accessories
N No Option

Coatings
G Gray (RAL 7040)

Battery
N No Option

Notes

- When ordering Beam Distribution **W** - Wide: Lumen Type = 7.
- When ordering Mounting Options "UMA" or "Retro-fit": Hardware Accessories = **N**.
- When ordering Mounting Option **U** - UMA Mounting Hub HZXW01, HZXW45, HZXS45 or HZXC34 is required. See page 37 for details.
- For lumen output see page 10.